
VP406×1372

	1. STEEL LITE FRAMES	
	Туре	SELF-ATTACHING & VANDAL-PROOF Design
,	Component	<u>Frame A & B</u> Tight mitered corners, no visible welds, countersunk mounting holes
	Material	Steel Cold Formed Profiles, T= 1.2mm
	Door Cutout	406 * 1372mm (ORDER SIZE)
	Frame O.D.	427 * 1393mm
	Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 14 pcs
	2. GLASS	
	Glass Size	377 * 1343mm [Recommended]
	Exposed Size	359 * 1325mm
	Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)
	3. INSTALLATION	Screws fasten the back frame to the front frame thru the door cutout;
	Comitor Side DOOR	Screw Seding Strip / Tape Single side mounting for non-corridor exposure w/ fastening screws included;
	4. FIRE RATING	
	5. APPLICATION	Doors with Frames and Glass not only provide light to a room, they ensure safety;



Door & Glass

[Recommend]

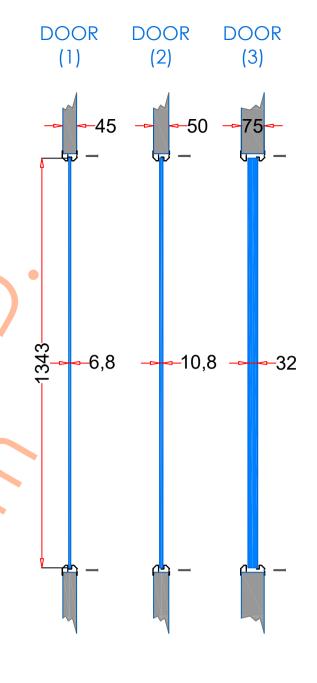