

VP48/x48/

1. STEEL LITE FRAMES	
Туре	SELF-ATTACHING & VANDAL-PROOF Design
Component	Frame A & B Tight mitered corners, no visible welds, countersunk mounting holes
Material	Steel Cold Formed Profiles, T= 1.2mm
Door Cutout	487 * 487mm (ORDER SIZE)
Frame O.D.	508 * 508mm
Screws	Sheet Metal Screws; Stainless Steel; M4*50mm (Std.) 12 pcs
2. GLASS	
Glass Size	458 * 458mm [Recommended]
Exposed Size	440 * 440mm
Glass Thk.	6.8mm, 10.8mm, 32mm (As Recommended)
3. INSTALLATION	Screws fasten the back frame to the front frame thru the door cutout;
Conitor Side DOOR	Class Front Frame B Behind Frame B Screw Screw Sealing Strip Door Cutout Door Cutout Page Cutout Single side mounting for non-corridor exposure w/fastening screws included;
4. FIRE RATING	
5. APPLICATION	Doors with Frames and Glass not only provide light to a room, they ensure safety;

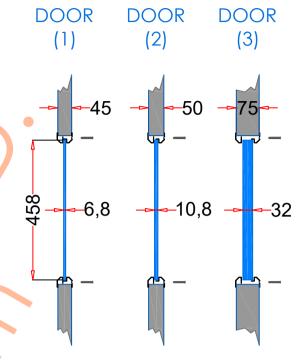

Door & Glass

[Recommend]

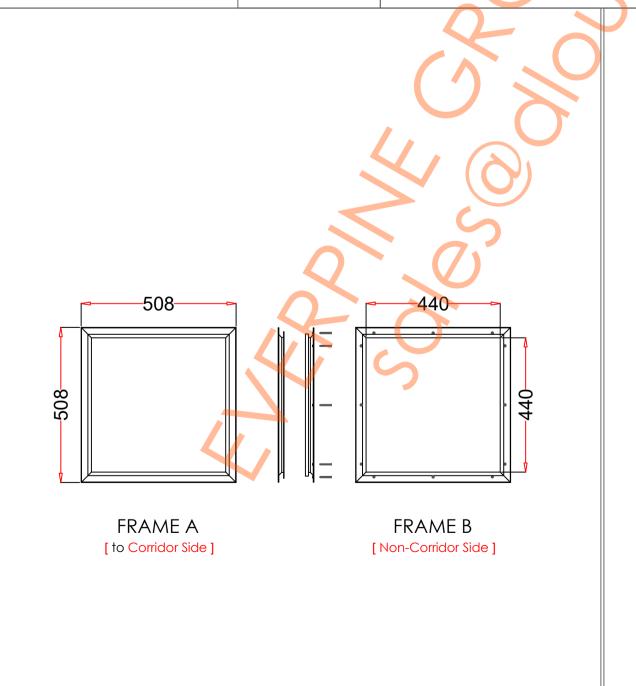

Frame Drawing

